



TW15

STANDARD STEPPED 0.260 BORE WITH LAGGING EXTENSION THREADED PROCESS CONNECTION

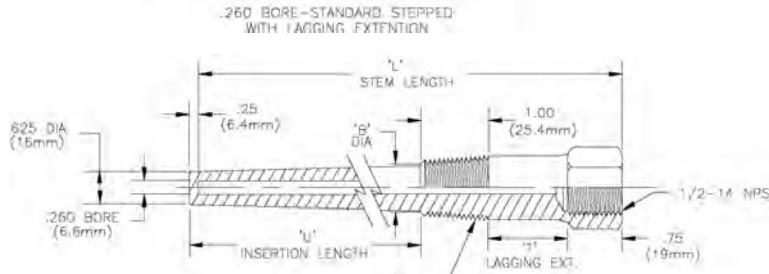


TW25

STANDARD TAPERED 0.260 BORE WITH LAGGING EXTENSION THREADED PROCESS CONNECTION

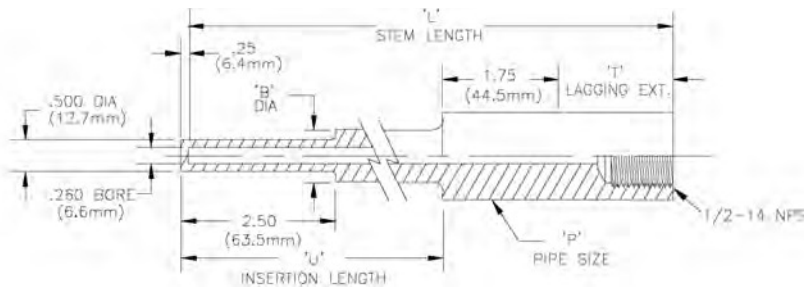

TW31

STANDARD STEPPED 0.260 BORE WITH LAGGING EXTENSION SOCKET WELD PROCESS CONNECTION

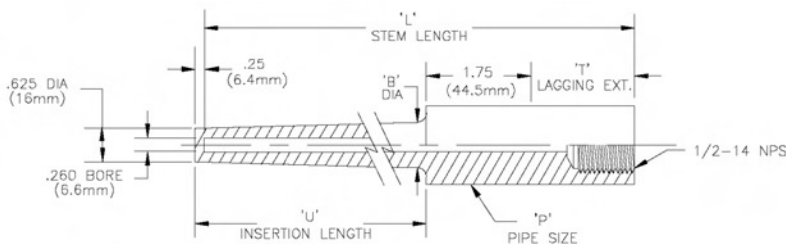

TW36

STANDARD TAPERED 0.260 BORE WITH LAGGING EXTENSION SOCKET WELD PROCESS CONNECTION

Custom Builder

MODEL 1 2 3 4

TW__ - __ - __ - __ - __

BOX1 CODE	Process Connection		
	" B "		" P "
	TW15 TW31	TW25 TW36	
1/2	0.63"	0.63"	1/2"
3/4	0.75"	0.88"	3/4"
1	0.88"	1.06"	1"

Other diameters and custom lengths available. Consult factory for details.

BOX2 CODE	Stem Length " U "
L = U + T + 1.5	1.63"
	2.5"
	4.5"
	6"
	7.5"
	9"
	10.5"
13.5"	
16.5"	

BOX3 CODE	Lagging Extension " T "
T1	1"
T2	2"
T3	3"
T4	4"
T5	5"
T6	6"
T7	7"
T8	8"

BOX4 CODE	Material
SS304	Stainless steel 304/L
SS316	Stainless steel 316/L
BR	Brass ASTM B16
CS	Carbon Steel C-1010
AL	Aluminum 6061
INC	Inconel 600
MN	Monel
HS	Hastelloy